

Chip Type, 105°C Use, Low Impedance Capacitors

GREEN
CAP


SMD

Low z

105°C
2000hours

Anti-
cleaning
solvent

- Compatible with surface mounting.
- Supplied with carrier taping.
- Guarantees 2000 hours at 105°C.
($\phi 8 \times 6.5L$ or less : 1000hours)
($\phi 12.5 \times 13.5L$: 5000hours)




Marking color : Black print ($\phi 4 \times 5.3L$ – $\phi 8 \times 6.5L$, $\phi 12.5 \times 13.5L$)
: White print on a brown sleeve ($\phi 8 \times 10L$ – $\phi 10 \times 10.5L$)

Specifications

Item	Performance																																	
Category temperature range (°C)	-55 to +105																																	
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)																																	
Leakage current (μA)	Less than 0.01CV or 3 whichever is larger (after 2 minutes) C : Rated capacitance (μF) ; V : Rated voltage (V) (20°C)																																	
Tangent of loss angle (tanδ)	<table><tr><td>Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td>tanδ (max.)</td><td>0.28</td><td>0.24</td><td>0.20</td><td>0.16</td><td>0.14</td></tr></table>						Rated voltage (V)	6.3	10	16	25	35	tanδ (max.)	0.28	0.24	0.20	0.16	0.14																
	Rated voltage (V)	6.3	10	16	25	35																												
	tanδ (max.)	0.28	0.24	0.20	0.16	0.14																												
0.02 is added to every 1000μF increase over 1000μF. (20°C,120Hz)																																		
Characteristics at high and low temperature	<table><tr><td colspan="2">Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td></tr><tr><td rowspan="2">Impedance ratio (max.)</td><td>Z-25°C/Z+20°C</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z-55°C/Z+20°C</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td></tr></table>						Rated voltage (V)		6.3	10	16	25	35	Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2	Z-55°C/Z+20°C	8	5	4	3	3								
	Rated voltage (V)		6.3	10	16	25	35																											
	Impedance ratio (max.)	Z-25°C/Z+20°C	4	3	2	2	2																											
Z-55°C/Z+20°C		8	5	4	3	3																												
(120Hz)																																		
Endurance (105°C) (Applied ripple current)	<table><tr><td>Test time</td><td colspan="6">1000 hours (φ8×6.5L or less) 2000 hours (φ8×10L to φ10×10.5L) 5000 hours (φ12.5×13.5L)</td></tr><tr><td>Leakage current</td><td colspan="6">The initial specified value or less</td></tr><tr><td>Percentage of capacitance change</td><td colspan="6">Within ±25% of initial value</td></tr><tr><td>Tangent of the loss angle</td><td colspan="6">200% or less of initial specified value</td></tr></table>						Test time	1000 hours (φ8×6.5L or less) 2000 hours (φ8×10L to φ10×10.5L) 5000 hours (φ12.5×13.5L)						Leakage current	The initial specified value or less						Percentage of capacitance change	Within ±25% of initial value						Tangent of the loss angle	200% or less of initial specified value					
	Test time	1000 hours (φ8×6.5L or less) 2000 hours (φ8×10L to φ10×10.5L) 5000 hours (φ12.5×13.5L)																																
	Leakage current	The initial specified value or less																																
	Percentage of capacitance change	Within ±25% of initial value																																
	Tangent of the loss angle	200% or less of initial specified value																																
Shelf life (105°C)	Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4																																	
Applicable standards	JIS C5101-1 1998, -18 1999 (IEC 60384-1 1992, -18 1993)																																	

Outline Drawing

Unit : mm

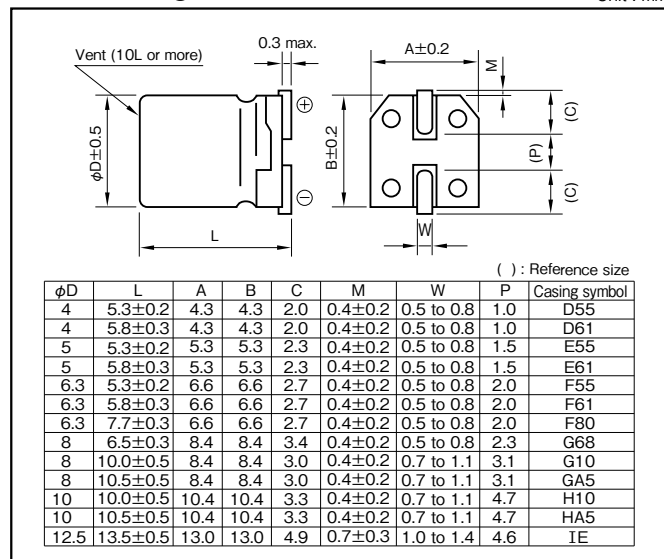

- Soldering conditions are described on page 15.
- Land pattern size are described on page 13.
- The taping specifications are described on page 16.

Coefficient of Frequency for Rated Ripple Current

Frequency (Hz)	120	1k	10k	100k
Rated voltage (V)				
6.3 to 35	0.50	0.75	0.90	1

Part numbering system

φ 10×10.5L or less (example : 6.3V1500μF)

RVZ	—	6	V	152	M	HA5	U	—	
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol	

In the case of "for High Temperature Reflow" type, a series name is "RZA".

φ 12.5×13.5L (example : 6.3V2700μF)

RVZ	—	6	V	272	M	IE	T	—	R5
Series code		Rated voltage symbol		Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol		Taping symbol	

If "For Vibration Resistance" type is required, please see the series RTZ of page 88.

Standard Ratings

Rated voltage (V) Rated capacitance (μF) Item	6.3				10				16				25				35			
	Case φD×L (mm)	Casing symbol	Impedance (Ω)	Rated ripple current (mA rms)	Case φD×L (mm)	Casing symbol	Impedance (Ω)	Rated ripple current (mA rms)	Case φD×L (mm)	Casing symbol	Impedance (Ω)	Rated ripple current (mA rms)	Case φD×L (mm)	Casing symbol	Impedance (Ω)	Rated ripple current (mA rms)	Case φD×L (mm)	Casing symbol	Impedance (Ω)	Rated ripple current (mA rms)
4.7	—	—	—	—	—	—	—	—	—	—	—	—	4×5.3	D55	3.20	65	4×5.3	D55	3.20	65
10	—	—	—	—	4×5.3	D55	3.20	65	4×5.3	D55	3.20	65	4×5.8	D61	1.80	80	5×5.3	E55	1.50	110
													5×5.3	E55	1.50	110	5×5.8	E61	0.76	150
15	—	—	—	—	—	—	—	—	4×5.8	D61	1.80	80	5×5.8	E61	0.76	150	5×5.8	E61	0.76	150
22	4×5.3	D55	3.20	65	4×5.8	D61	1.80	80	5×5.3	E55	1.50	110	5×5.8	E61	0.76	150	5×5.8	E61	0.76	150
	4×5.8	D61	1.80	80	5×5.3	E55	1.50	110	5×5.8	E61	0.76	150	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170
33	5×5.3	E55	1.50	110	5×5.3	E55	1.50	110	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170
	5×5.8	E61	0.76	150	5×5.8	E61	0.76	150	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230
47	5×5.3	E55	1.50	110	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×5.8	F61	0.44	230
	5×5.8	E61	0.76	150	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280
																	8×6.5	G68	0.34	280
68	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280
																	8×6.5	G68	0.34	280
100	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×5.3	F55	0.85	170	6.3×7.7	F80	0.34	280	8×10	G10	0.20	450
	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	8×6.5	G68	0.34	280	8×10.5	GA5	0.17	450
													8×6.5	G68	0.34	280	8×10.5	GA5	0.17	450
150	6.3×5.8	F61	0.44	230	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280	8×10	G10	0.20	450	8×10.5	GA5	0.17	450
									8×6.5	G68	0.34	280	8×10.5	GA5	0.17	450	10×10	H10	0.10	670
220	6.3×5.8	F61	0.44	230	6.3×7.7	F80	0.34	280	6.3×7.7	F80	0.34	280	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450
	6.3×7.7	F80	0.34	280	8×6.5	G68	0.34	280	8×10	G10	0.20	450	10×10	H10	0.10	670	10×10	H10	0.10	670
					8×10	G10	0.20	450												
330	6.3×7.7	F80	0.34	280	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	10×10.5	HA5	0.09	670
	8×6.5	G68	0.34	280	10×10	H10	0.10	670	10×10	H10	0.10	670	10×10	H10	0.10	670				
	8×10	G10	0.20	450																
470	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	8×10.5	GA5	0.17	450	10×10.5	HA5	0.09	670	12.5×13.5	IE	0.06	1100
	10×10	H10	0.10	670	10×10	H10	0.10	670	10×10	H10	0.10	670								
680	8×10.5	GA5	0.17	450	10×10.5	HA5	0.09	670	10×10.5	HA5	0.09	670	12.5×13.5	IE	0.06	1100	12.5×13.5	IE	0.06	1100
1000	8×10.5	GA5	0.17	450	10×10.5	HA5	0.09	670	12.5×13.5	IE	0.06	1100	12.5×13.5	IE	0.06	1100	—	—	—	—
	10×10	H10	0.10	670																
1500	10×10.5	HA5	0.09	670	12.5×13.5	IE	0.06	1100	12.5×13.5	IE	0.06	1100	—	—	—	—	—	—	—	—
2200	12.5×13.5	IE	0.06	1100	12.5×13.5	IE	0.06	1100	—	—	—	—	—	—	—	—	—	—	—	—
2700	12.5×13.5	IE	0.06	1100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 105°C, 100kHz ; Impedance : 20°C, 100kHz